
CONTIFLEX® ER Textile Conveyor Belts for a Wide Range of Conveying Tasks

Conveyor Belt Group





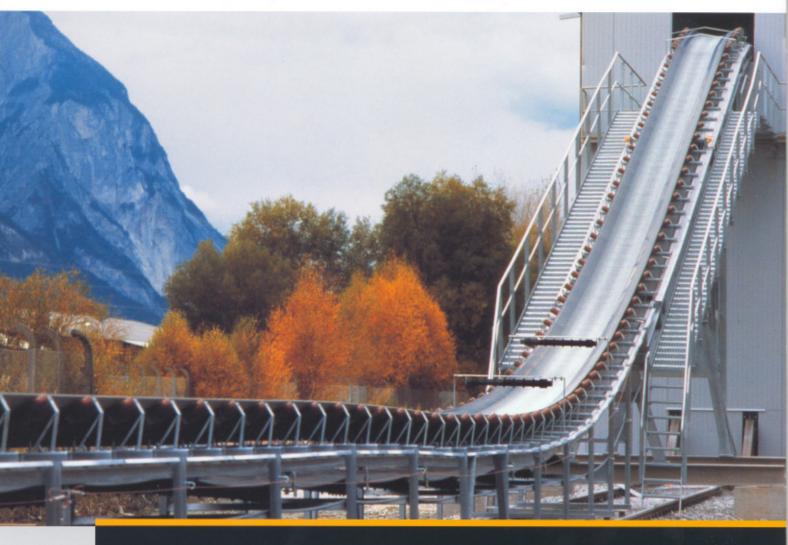

# CONTIFLEX® EP textile conveyor belts with epoxy plies

#### ContiTech Conveyor Belt Group

We are manufacturers of textile and steel cable conveyor belts, special products and service material – for use in mining, mechanical engineering, machine construction and many other industries. At our Northeim plant, one of the most modern of its kind, we ensure consistently high quality. Every order is backed by our comprehensive customer service program that includes providing useful advice on planning and application engineering, installing the belt, starting up the conveyor and maintaining the belt on-site.

Non-stop belts Non-stop service

Keep on running

		Carcass thickness	Carcass weight	Recomm. min. pulley diameter (drive)	
2-ply belts		in mm	in kg/m²	in mm	
CONTIFLEX® EP	315/2	1.9	2.5	200	
	400/2	2.3	2.8	250	
	500/2	2.9	3.0	315	
	630/2	3.3	4.1	400	
	800/2	4.0	4.6	500	
3-ply belts					
CONTIFLEX® EP	500/3	3.0	3.6	400	
	630/3	3.6	4.1	500	
	800/3	4.5	4.4	500	
	1000/3	5.1	6,1	630	
	1250/3	6.2	6.8	800	
4-ply belts					
CONTIFLEX® EP	630/4	4.1	4.7	500	
	800/4	4.9	5.4	630	
	1000/4	6.1	5.8	800	
	1250/4	7.0	8,0	800	
	1600/4	8.5	9.0	1000	
5-ply belts					
CONTIFLEX® EP	800/5	5.2	5.9	630	
	1000/5	6.2	6.7	800	
	1250/5	7.7	7.2	1000	
	1600/5	8.8	10.0	1000	
	2000/5	10.7	11.2	1250	

Other types on request.

## Precision and durability for the most difficult operating conditions

CONTIFLEX® textile conveyor belts with epoxy plies are robust and are suitable for heavy-duty operations due to their polyester/polyamide ply design. The low elongation tension member enables short take-ups. The belt gives high resistance to penetration damage and optimum adhesion between plies. CONTIFLEX® EP with cut edges or rubber edges is resistant to rotting; it is easy to mould and guarantees high operational reliability and durability, even with small pulley diameters. The use of modern textiles and state-of-the-art production technologies ensures

that CONTIFLEX® EP retains its belt alignment over a long service life.

#### Flexible dimensions for individual requirements

CONTIFLEX® EP is available in standard widths up to 3200 mm and (with longitudinal seams) in super-widths up to 5600 mm, depending on belt thickness and length. Cover thicknesses can be selected according to the intended use.

Weight: to determine the approximate weight of the belt, add the carcass weight and about 1.1 kg/m² per mm of cover.



Designation	DIN 22102 ref.	Special properties	Tear strength in N/mm²	Tear elongation in %	Abrasion in mm <sup>3</sup>	Hardness in ShA
NQ	Y	sun check resistant	22	550	100	60
Conti extra	Y	sun check resistant	22	550	100	60
Conti extra	Y	suitable for bonding	23	500	100	60
ATRB	×	high abrasion resistance	28	550	90	60
AA	W	high abrasion resistance	21	500	60	60
Conti XS	×	resistance to cutting	28	600	80	60
FW-K	K, Y	flame retardant	22	600	130	60
FW-S	S, Y	flame retardant	22	600	130	60
TDWN		flexural strength	23	450	150	75
Clean		dirt-repellent	18	400	50	75

Values given are statistical mean values.

#### Covers with optimum properties

The CONTIFLEX® EP range contains a wide selection of covers for all applications, providing the optimum solution in each case, and going well beyond the relevant


standards. The specific properties are the result of intensive research based on practical testing and extensive field trials. They are also attributable to the extensive know-how of the ContiTech division in the rubber sector.

The following splice lengths L <sub>V</sub> apply to the textile types used:							
in mm	EP160	EP200	EP250	EP315	EP400		
1-stage	200	250	250	300	300		
2-stage	400	500	500	600	600		
3-stage	600	750	750	900	900		
4-stage	800	1000	1000	1200	1200		

For the bevel LA of the splice, 30% of belt width B should be added.

#### Splicing with high-grade materials

CONTIFLEX® EP conveyor belts are made by the latest production techniques, using high-grade materials and environment friendly raw materials. In-house-developed processes and staff skills are a further guarantee for the constantly high standard of our conveyor belts.





CONTIFLEX® textile conveyor belts fulfil a wide variety of transport tasks in all types of industry. In addition to a range of belts for normal bulk goods, various special types are available for conveying hot goods, for the transport of goods containing oil and grease, for steep-incline conveying and with special reinforcing materials for particular applications.

#### Modern production

#### techniques and systematic quality assurance

CONTIFLEX® EP conveyor belts are made by the latest production techniques, using high-grade materials and environment friendly raw materials. In-house-developed processes and staff skills are a further guarantee for the constantly high standard of our conveyor belts.

This well-developed sense of quality is reflected in an efficient quality assurance programme at all stages of the

project, from initial inquiry through to delivery, in accordance with stringent ISO 9001 guidelines. International approval as a supplier to major customers confirms the high quality of products, operations and processes.

#### Service partners

ContiTech Transportbandsysteme GmbH provides a customer-oriented service worldwide in consultancy and planning for conveyors through to installation, start-up and servicing during operation. A team of applications engineers is on hand to make design calculations with special computer programs and to give comprehensive on-site advice. They are backed by the experience gained in the use of our conveyor belts throughout the world.

### Service-tested in a wide range of applications

ContiTech Transportbandsysteme GmbH supplies a range of CONTIFLEX® textile conveyor belts with epoxy plies as 2, 3, 4 and 5-ply belts of various designs and dimensions. They are of a practical design, equipped with tailor-made covers and meet the highest requirements in many different sectors, such as:

- Mining
- Iron and steel industry
- Construction industry
- Non-metallic minerals
- Gravel quarrying
- Cement industry
- Cargo handling facilities
- Power stations

Continuous quality assurance to ISO 9001 is standard daily working practice.



#### Market segments

#### ContiTech Service worldwide

A-2351 Wiener Neudorf

ContiTech Belux B-2627 Schelle Phone +32 (0)3-880-71 40 Fax +32 (0)3-880-71 41

Continental Suisse S.A. Lerzenstraße 19 CH-8953 Dietikon 1 Fax +41 (0)43-343 20 11

del Caucho S.A. ContiTech Cityparc-Ronda de Dalt E-08940 Cornellà (Barcelona) Phone +34 93-4 80 04 00 Fax +34 93-4 80 04 01

3, rue Fulgence Bienvenue CE 147 Phone +33 (0)1-41.47.92.92 Fax +33 (0)1-47.92.08.22

Z.I. de la Silardière F-42500 Le Chambon-Feugerolles Fax +33 (0)4-77.10.19.77

ContiTech U.K. Chestnut Field GB-Rugby, CV21 2PA Warwickshire Phone +44 (0)1788-57 1482

ContiTech Holding AG Shanghai Office Rm. 906B Block C Orient Intern. Plaza No. 85 Lou Shan Guan Lu Postcode 200335 PRC-Shanghai Fax +86 (0)21-62 78 77 40

Contilech Scandinavia AB Finlandsgatan 14 S-16493 Kista Phone +46 (0)8-4 44 13 30 Fax +46 (0)8-7 50 55 66

Continental Tyre and Rubber Singapore Pte. Ltd. 298 Tiong Bahru Road #02-01 Tower Block Tiong Bahru Plaza SGP-Singapore 168730 Phone +65 6377-1223

ContiTech North America, Inc. 136 Summit Avenue USA-Montvale, NJ 07645 Phone +1 201-930-0600

#### Market segment Industry

D-07422 Bad Blankenburg Fax +49 36741 5203

Transportbandsysteme GmbH Phone +49 5551 702-207 Fax +49 5551 702-504

IMAS A.E./SYRMA A.E. GR-38110 Voios Phone +30 24210-96-500 Fax +30 24210-96-590

Conveyor Belt Systems H-6728 Szeged Phone +36 62 566-700 Fax +36 62 566-713

Phone +91 33280-6637 Fax +91 33280-6638

Mexicana S.A. de C.V. MEX-C.P. 78090 -San Luis Potosí S.L.P. Phone +52 444 82 69400 Fax +52 444 82 69423

Shanxi Phoenix PRC-046000 Changzhi Phone +86 355208-6301 Fax +86 355208-1423

CAUCHO TECNICA S.A. Phone +56 2 5600400 Fax +56 2 7361101

The content of this publication is provided for information only and without responsibility. ContiTech Holding AG's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold Unless otherwise agreed in writing, the information contained herein does not become part of these agreements. This publication does not contain any guarantee or agreed quality of ContiTech AG's products or any warranty of mer-chantability, fitness for a particular purpose and non-infringement. ContiTech AG may make changes in the products or services described at any time without notice. This publication is provided on an "as is" basis. To the extent permitted by tive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world. Copyright © 2005 ContiTech AG. All rights reserved.

